


Hot Water Thermometer Pressing Beze

Application

These Hot Water Thermometers are suitable for use in numerous applications that require an accurate temperature readings, such as in the HVAC industry for hot water lines, boilers / hydronic heating, etc.

Specification

Case: Black steel (chromed steel, stainless steel)
 Ring: Black steel (chromed steel, stainless steel)
 Window: Glass
 Dial and pointer: Aluminum
 Stem: Brass (stainless steel)
 Thermowell: Brass
 Connection: 1/2"NPT (1/2"BSP)
 Temperature range: 0-60°C~120°C / 30-108°F~250°F

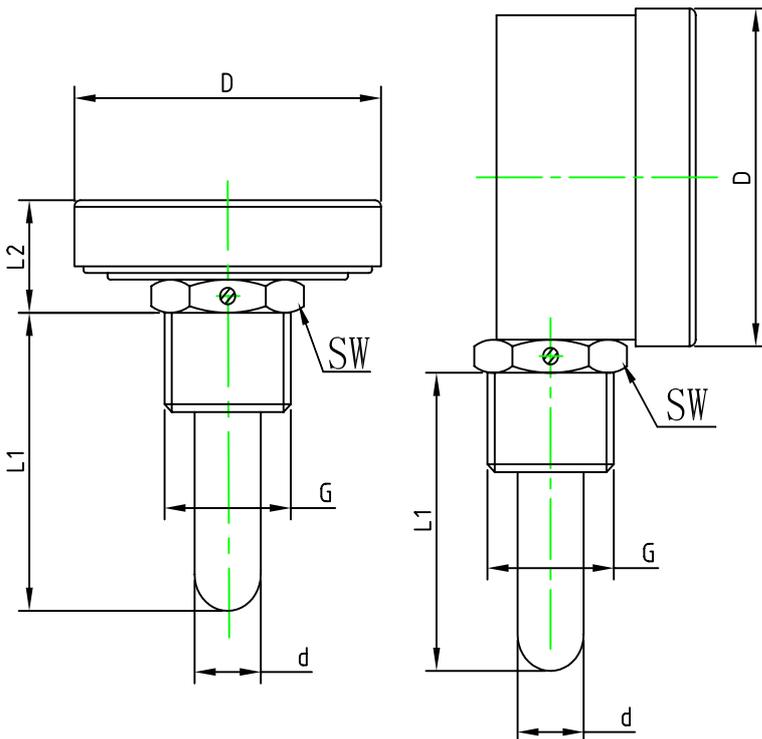

Size Diameter	L1	L2	G	D	d★	SW
2"(50mm)	40, 60, 100 160, 200 250, 300		1/2"BSP	50	11 (12)	22
2.5"(63mm)	40, 60, 100 160, 200 250, 300	23		63	11 (12)	22
3"(75mm)	40, 60, 100 160, 200 250, 300	25	1/2"NPT	75	11 (12)	22
4"(100mm)	40, 60, 100 160, 200 250, 300	30		100	11 (12)	22

★ d=11 with thermowell length L1>100.